

INSTALLATION INSTRUCTION- Lever selector bush repair kit



1. Replace the selector bushing within the gear stick. Removal of the entire chip is not required.




Replace the worn selector bushing which has a loose one. This can cause play in the gear-shift lever.




2. Remove the bolts and release the shift cable from the jack pin.



3. Remove the gear lever.

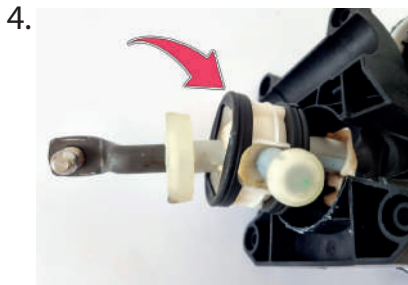

4. The seat of the old lever selector bushing that we are replacing.

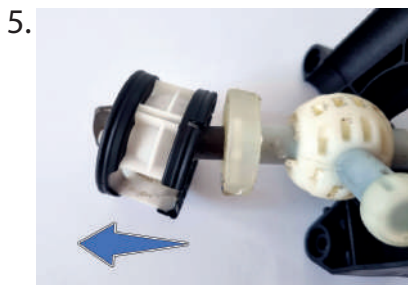


5. Pull out the old bushing with a strong movement.



6. Prepare a new bushing.




7. To make it easier to put a new bushing on, we need to warm it up to make it more plastic. Boil the water and put the sleeve in the pot.

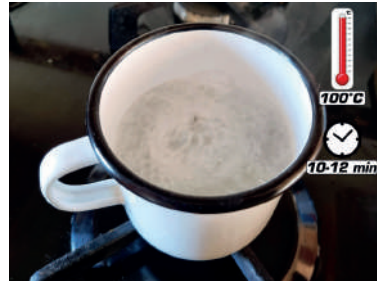

Place the new bushing in boiling water for about 10-12 minutes



8. Lubricate the inside of the bushing.

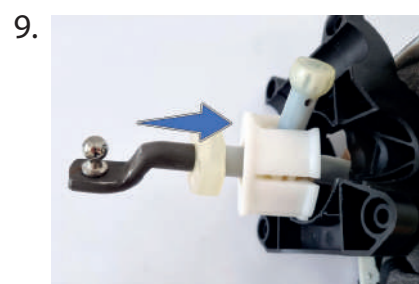

9. Slide the bushing over the selector. (it will take strength)



10. Put the configured bar into the car.